


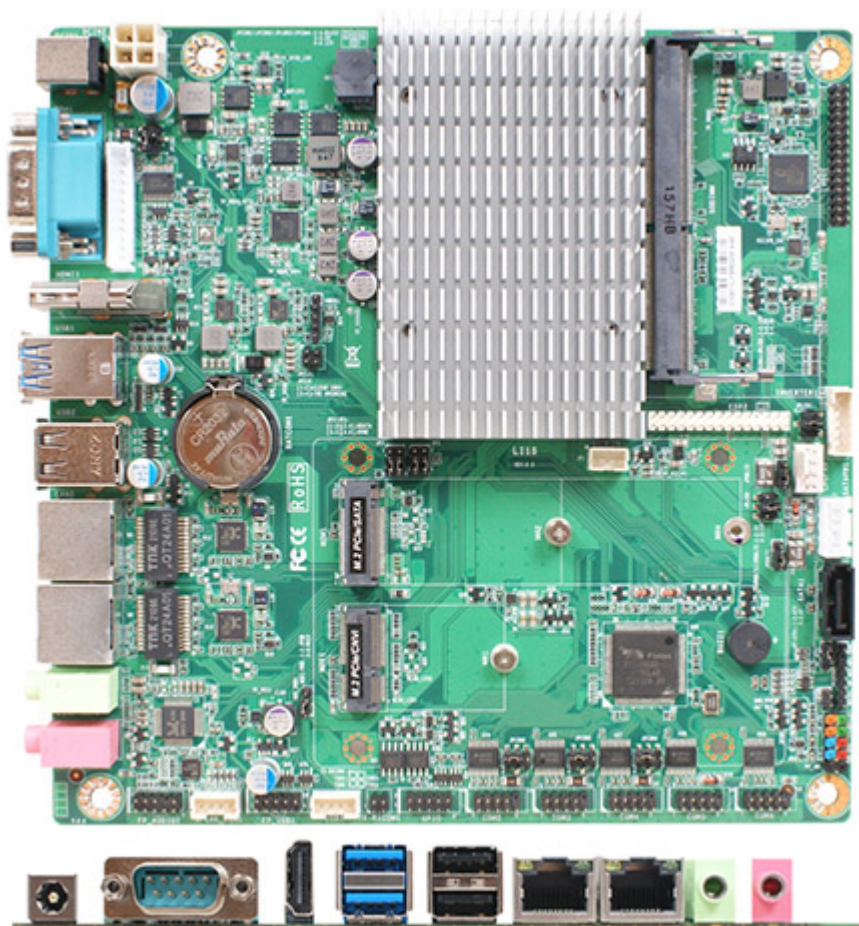

999.00 EUR

incl. 19% VAT, plus [shipping](#)

- J4125 Gemini Lake !
- 1x COM !
- Triple Display !
- MiniITX !

- Intel® Gemini Lake J4125 2.0GHz Quad Core MCP Processor (10W, Turbo 2.7GHz)
- 1\* DDR4 2400MHz SO-DIMM up to 8GB
- 2\* Realtek® RTL8119I GbE, 1\* M.2 E-key support WIFI/BT
- 1\* SATAIII, 1\* M.2 M-key
- 1\* HDMI, 1\* eDP, 1\* LVDS
- 2\* RS232/485, 4\* RS232, 2\* USB3.0, 5\* USB2.0
- 12V DC-in
- Thin Mini ITX Form Factor (170 x 170 mm)

|                  |                                                                                                                                                                                                                                                 |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model            | – JLI1S-5L                                                                                                                                                                                                                                      |
| Form Factor      | – Mini-ITX (6.7-in * 6.7-in, 170 * 170mm)                                                                                                                                                                                                       |
| Processor System | – Intel® Gemini Lake J4125 2.0GHz/QC Core MCP Processor (10W, Turbo 2.7GHz)<br>– Intel J4125 SoC chipset<br>– AMI 128Mb Flash ROM BIOS                                                                                                          |
| Expansion Slot   | – 1* M.2 E-key (2230, support WIFI/BT Module)                                                                                                                                                                                                   |
| Memory           | – 1* DDR4 2400MHz SDRAM SO-DIMM up to 8GB                                                                                                                                                                                                       |
| Graphics         | – Intel® 600 series Graphics, shared memory<br>– 1* HDMI1.4 (Max Resolution : 3840×2160@24Hz, Co-lay VGA)<br>– 1* LVDS (Max Resolution : 2560×1600@60Hz, Co-lay eDP)<br>– 1* eDP (Max Resolution : 3840×2160@60Hz)<br>– Support Triple Displays |
| Ethernet         | – 2* Realtek® RTL8119I GbE                                                                                                                                                                                                                      |

|                    |                                                                                                                                                                                                                                                                                                                                                            |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Audio              | <ul style="list-style-type: none"> <li>– Realtek HD audio</li> <li>– 3W speaker amplifier</li> </ul>                                                                                                                                                                                                                                                       |
| Storage            | <ul style="list-style-type: none"> <li>– 1* SATAIII (6Gb/s)</li> <li>– 1* M.2 M-key (2242/2280, SATA or NVMe PCIe2)</li> </ul>                                                                                                                                                                                                                             |
| Rear I/O           | <ul style="list-style-type: none"> <li>– 1* HDMI</li> <li>– 1* RS232</li> <li>– 2* RJ45</li> <li>– 2* USB3.0</li> <li>– 2* USB2.0</li> <li>– Line-out/MIC</li> <li>– 12V DC-in</li> </ul>                                                                                                                                                                  |
| Internal Connector | <ul style="list-style-type: none"> <li>– 3* USB2.0</li> <li>– 2* RS232/485</li> <li>– 2* RS232</li> <li>– 1* SATAIII</li> <li>– 1* SATA power</li> <li>– 2* M.2 (1* M-key, 1* E-key)</li> <li>– 8bit GPIO (5V)</li> <li>– 1* AT mode</li> <li>– 1* I2C/SMBUS</li> <li>– 1* FP_Audio</li> <li>– 1* speaker</li> <li>– 1* CPU Fan (W/O Smart FAN)</li> </ul> |
| Watchdog Timer     | <ul style="list-style-type: none"> <li>– From Super I/O to drag RESETCON#</li> <li>– 256 segments (10sec ~ 255min)</li> </ul>                                                                                                                                                                                                                              |
| Power              | <p>12V DC-in, AT/ATX Supported</p> <ul style="list-style-type: none"> <li>– AT: Directly PWR on as Power input ready</li> <li>– ATX: Press Button to PWR on after Power input ready</li> </ul>                                                                                                                                                             |
| Compliance         | <ul style="list-style-type: none"> <li>– CE, FCC, RoHS, REACH</li> </ul>                                                                                                                                                                                                                                                                                   |
| Temperature        | <ul style="list-style-type: none"> <li>– Operating: 0°C ~ 60°C</li> <li>– Storage: -20°C ~ 70°C</li> <li>– Humidity: 10% ~ 90% RH @40°C (non-condensing)</li> </ul>                                                                                                                                                                                        |
| OS Support         | <ul style="list-style-type: none"> <li>– Windows 10, Linux</li> </ul>                                                                                                                                                                                                                                                                                      |