


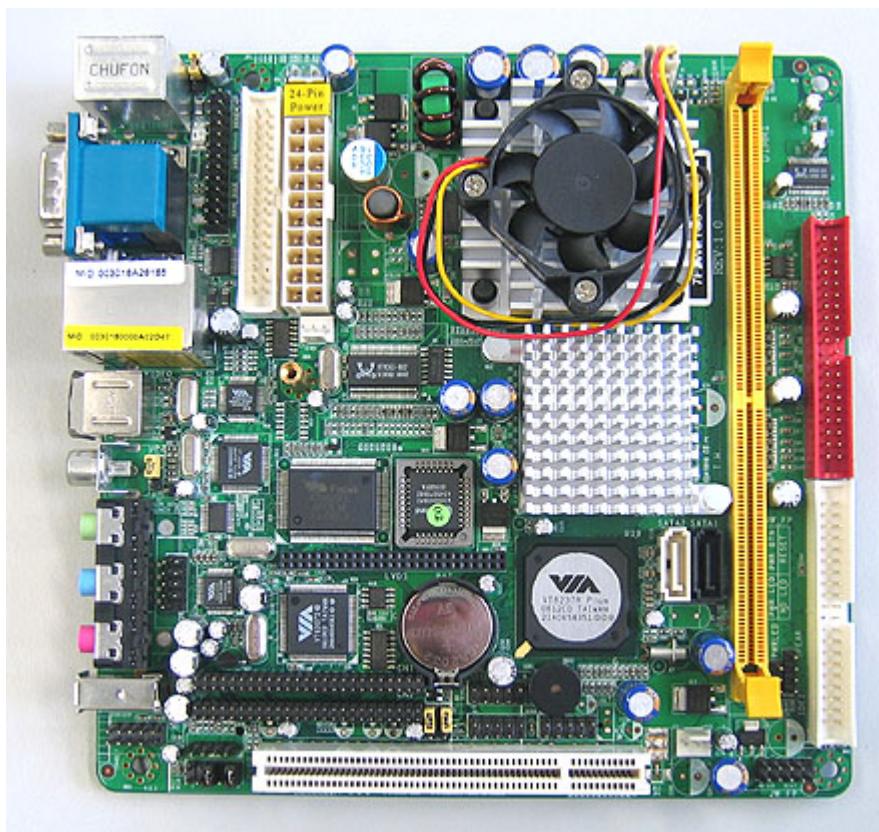

148.00 EUR

incl. 19% VAT, plus [shipping](#)

- VIA C7 NanoBGA CPU
- 1.5 Ghz !
- DDR-II !
- 12W

This board is based on the latest VIA C7 architecture.

| 7F2WE-1G5-OC Specifications |                                       |
|-----------------------------|---------------------------------------|
| Processor                   | VIA C7 1.5 GHz processor              |
| Chipset                     | VIA CN700 north bridge                |
|                             | VIA VT8237R south bridge              |
| System Memory               | 1 DDR2 400/533 DIMM                   |
|                             | Up to 1GB memory size                 |
| VGA                         | Integrated VIA UniChrome AGP graphics |
| Expansion Slots             | 1 PCI                                 |
| Onboard IDE                 | 4 Ultra DMA 133                       |
| Onboard Serial ATA          | 2 SATA connectors                     |
| Onboard Floppy              | 1 Floppy Port                         |
| Onboard USB                 | 8 USB 2.0                             |
| Onboard LAN                 | VIA 6103 10/100                       |
| Onboard Audio               | ALC655 6 channel AC'97 codec          |
| Onboard TV Out              | VIA VT1622A TV encoder                |
| Onboard 1394                | IEEE 1394                             |

|                                |                                                                                                                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Back Panel I/O                 | 1 1394<br><br>1 RCA video<br><br>1 VGA port<br><br>2 USB 2.0<br><br>1 LAN port<br><br>2 IEEE 1394 ports<br><br>1 serial ports<br><br>1 PS2 mouse port<br><br>1 PS2 keyboard port<br><br>3 audio jacks: line-out, line-in, and mic-in |
| Onboard I/O Connectors         | 3 USB 2.0 connectors for 6 USB ports<br><br>1 parallel port<br><br>1 VGA port<br><br>2 serial ports<br><br>1 PS2 keyboard connector<br><br>1 PS2 mouse connector<br><br>1 floppy port<br><br>Line-in/out/MIC audio ports             |
| BIOS                           | Award BIOS LPC 4Mbit Flash memory                                                                                                                                                                                                    |
| System Monitoring & Management | CPU temperature<br><br>Modem ring wake up<br><br>RTC Alarm<br><br>Keyboard power on<br><br>System temperature<br><br>System voltage<br><br>Fan speed                                                                                 |
| Operating Humidity             | 0% - 95% (relative humidity; non-condensing)                                                                                                                                                                                         |
| Form Factor                    | Mini-ITX (17cm x 17cm)                                                                                                                                                                                                               |
| Includes                       | ATA 133 flat cable (40 wire, 80 conductor, 3 connectors)<br><br>CD<br><br>SATA Cable<br><br>Floppy Cable                                                                                                                             |